

## 1-phase AC Relay for Inductive Loads SSRQ

- Designed for all types of loads up to 400 VAC
- Zero-cross output switching
- 10 A, 16 A, or 25 A switching RMS current
- 4 input ranges
- 4000 V input/output insulation
- Heatsinks available



The SSRQ solid state relay is a zero-cross operating electronic module designed to switch single-phase AC power loads. Since there are no moving parts, noise, shocks, and vibration during the operation, the life and reliability of the SSR module, compared to these of the contact relays, are much higher. Thanks to a snubberless™ triac, SSRQ can switch both active and inductive loads up to 25 A at power voltage up to 400 VAC. The control input is optically isolated from the output and accepts AC or DC voltage signals.

### Technical specifications

#### Input

<b>Control voltage</b>	4...36 VDC	6...26 VAC/DC	115 VAC	230 VAC
<b>Input current</b>	5...12 mA	6...12 mA	6 mA	12 mA
<b>Turn-on/off voltage</b>	3 VDC	4 VAC / 5 VDC	90 VAC	180 VAC
<b>Reverse voltage protection</b>	-32 VDC	-32 VDC	-	-
<b>Output</b>	(no connection with the input types!)			
<b>On-state current at proper heatsink<sup>(1)</sup></b>	≤ 10 A <sub>rms</sub>	≤ 16 A <sub>rms</sub>	≤ 25 A <sub>rms</sub> <sup>(2)</sup>	
<b>Minimum holding current</b>	50 mA	50 mA	80 mA	
<b>Non-rep. surge current at t = 20 ms</b>	100 A	160 A	250 A	
<b>Maximum leakage current</b>	1 mA	2 mA	3 mA	
<b>Critical rate of current rise dI/dt</b>	50 A/μs	50 A/μs	50 A/μs	
<b>I<sup>2</sup>t value for fusing at t = 10 ms</b>	78 A <sup>2</sup> s	78 A <sup>2</sup> s	78 A <sup>2</sup> s	
<b>On-state voltage at rated current</b>	1.6 V <sub>rms</sub>	1.6 V <sub>rms</sub>	1.6 V <sub>rms</sub>	
<b>Critical off-state voltage rise dV/dt</b>	400 V/μs	400 V/μs	500 V/μs	
<b>Operational frequency</b>	45...65 Hz	45...65 Hz	45...65 Hz	
<b>Thermal resistance (junction-case)</b>	2.3 °C/W	2.1 °C/W	1.1 °C/W	


#### General specifications

<b>Maximum operating AC voltage</b>	282 VAC <sub>rms</sub>	400 VAC <sub>rms</sub>
<b>Minimum operating AC voltage</b>	24 VAC <sub>rms</sub>	24 VAC <sub>rms</sub>
<b>Rep. off-state peak voltage</b>	600 V <sub>p</sub>	800 V <sub>p</sub>
<b>Non-rep. off-state peak voltage</b>	700 V <sub>p</sub>	900 V <sub>p</sub>
<b>Operating temperature</b>	-20...65 °C	-40...85 °C
<b>Storage temperature</b>	glass-filled plastic	aluminum
<b>Case material</b>	4000 VAC <sub>rms</sub>	2500 VAC <sub>rms</sub>
<b>Base plate (heatsink) material</b>	IP00	
<b>Input/output insulation</b>	4 x M4 screws	
<b>Output/case insulation</b>	2 x M4 screws	
<b>Protection class</b>	MAC2 rail clamp <sup>(3)</sup>	
<b>Wiring</b>	ø3, red	
<b>Mounting</b>	≈ 100 g	
<b>Rail mounting</b>		
<b>ON-indicating LED</b>		
<b>Weight</b>		

<sup>(1)</sup> We highly recommend using SSR at no more than 80% of maximum on-state current!

<sup>(2)</sup> Ask for availability!

<sup>(3)</sup> Ordered separately (see 'Accessories')

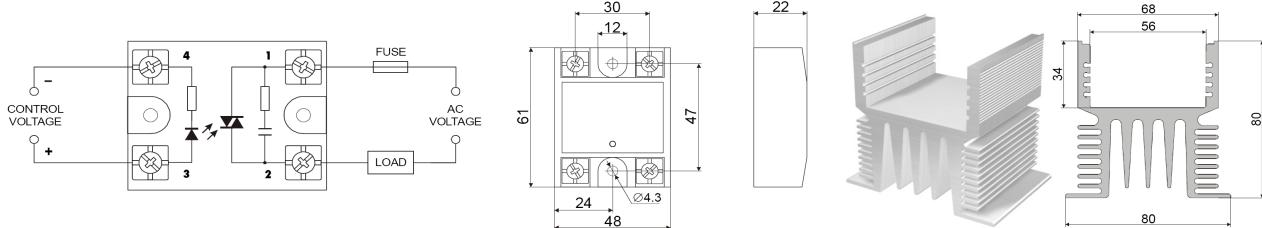

### Heatsink specifications

Heatsink surface [cm<sup>2</sup>] / length [mm] (at 85 °C heatsink temperature)

SSRQ variant	10	16		25		
Current →	10 A	10 A	16 A	15 A	20 A	25 A
Ambient temperature ↓						
20 °C	72 / 62	60 / 62	214 / 62	134 / 62	287 / 62	499 / 62
40 °C	150 / 62	124 / 62	445 / 62	278 / 62	601 / 62	1041 / 100
60 °C	485 / 62	400 / 62	1435 / 135	907 / 85	1924 / 180	

### Ordering code

SSRQ\* - G1

Code	Feature or option	Code values
*	Variant	280 V <b>10L, 16L, 25L</b> <sup>(2)</sup> 400 V <b>10H, 16H, 25H</b> <sup>(2)</sup>
G1	Input	A - 230 VAC, B - 115 VAC, D - 4...36 VDC, E - 6...26 VAC/DC

### Applicable accessories

Code	Description
HS	Heatsink (specify the length [mm] using the table above) w/ or w/o rail-mounting clamp <sup>(3)</sup>

Distribuitor:

**SYSCOM 02 SRL Bucuresti**

Tel/Fax: 021 410 5281

mobil: 0722 725 659

e-mail: [syscom02@automatizariindustriale.ro](mailto:syscom02@automatizariindustriale.ro)

[www.automatizariindustriale.ro](http://www.automatizariindustriale.ro)